


# Heater Treater Anodes Zinc or Aluminum

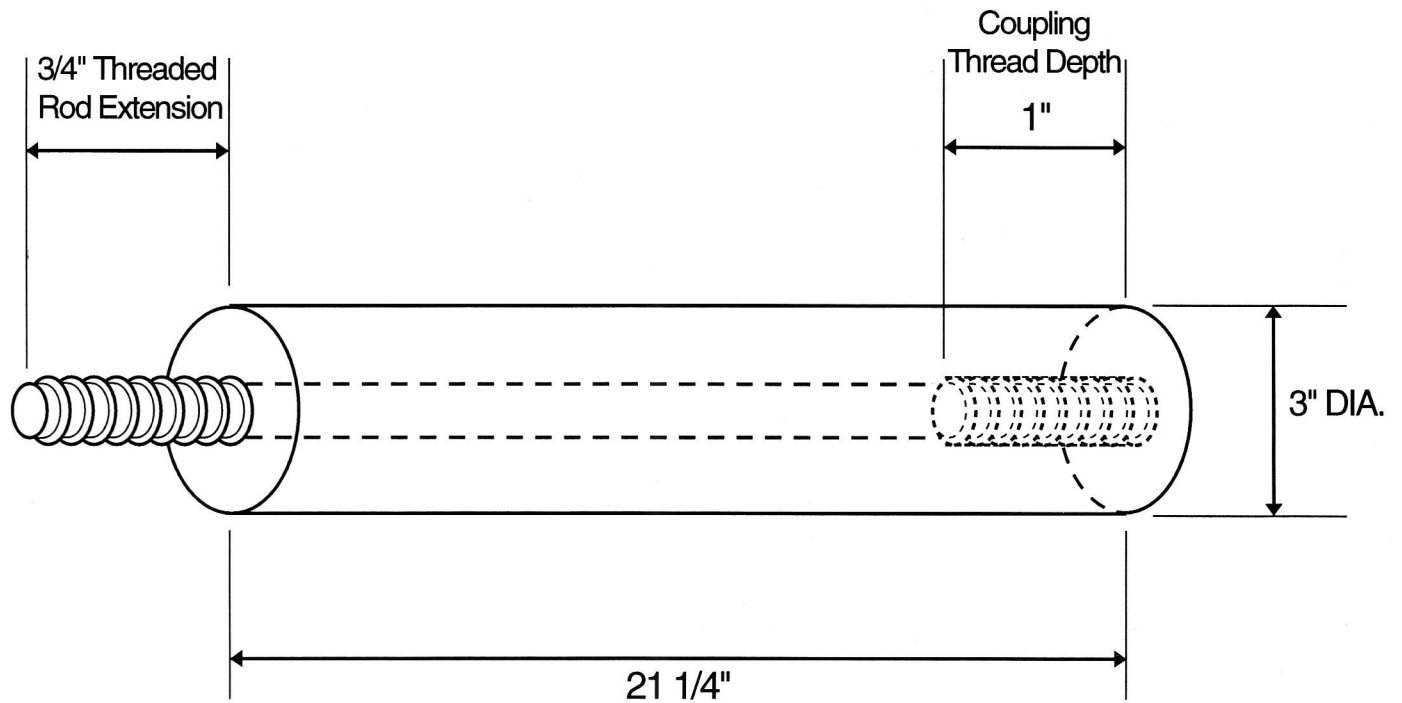

## ZINC ALLOY OR ALUMINUM ALLOY

ANODE ALLOY	EFFICIENCY IN AMP-HOURS PER POUND	CONSUMPTION RATE IN POUNDS PER AMP-YEAR	NEGATIVE POTENTIAL TO CUCU SO <sub>4</sub> REF. CELL
ALUMINUM ALLOY	1150	7.60	-1.15V
ZINC ALLOY	354	24.80	-1.09V

### Cores

5/8" NF Threaded Rod  
5/8" NF Female Coupling

Aluminum WGT. 13.5 lbs.  
Zinc WGT. 35.5 lbs.