


TINKER & RASOR

HALF
CELLS

REFERENCE ELECTRODES

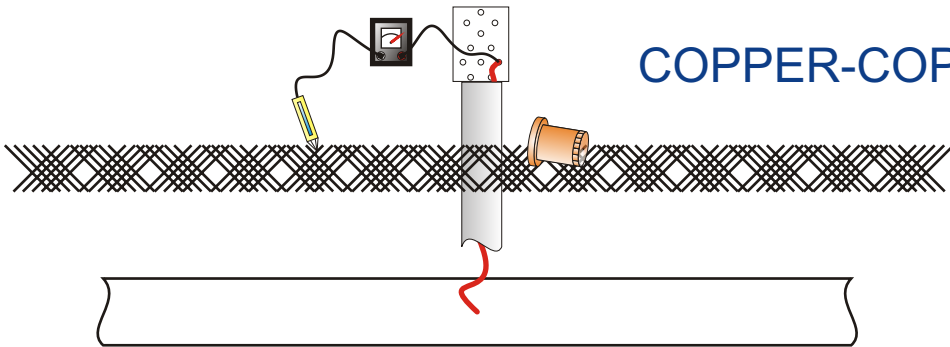

COPPER-COPPER/SULFATE
(CuCu/SO⁴)

Portable Reference Electrodes, ready to use. Just add distilled water.



6" and 8" lengths available from stock
Pencil-type can get into cracks in roadbeds
Half cells screw directly into T&R CP Voltmeters
Copper Sulfate charge included
Extension handles available
Waterproof Adapter

Available accessories:

- Replacement crystals
- Anti-freeze solution
- Extension handles
- Lead cable

Porous plug, pre-saturated
See-through window
Pointed tip and flat tips available
Large surface area available for
work on concrete (Model 3-A)

Distributed by



Half cell attached
to T&R CP voltmeter.
Extension handles
also available.

AVAILABLE FROM STOCK!

www.teststations.com

www.detectron.com

www.tinker-rasor.com

Info@tinker-rasor.com



An ISO 9001 Registered Company

Tinker & Rasor quality is found in our products, our people and our customer service.



REFERENCE ELECTRODES



TINKER & RASOR

CORROSION MITIGATION INSTRUMENTATION

PRODUCT DATA SHEET

MODELS 2-A, 3-A, 6-A, 6-B, 8-A and 8-B

Features:

- Flat and Pointed Tips
- Tip grooves provide greater surface area
- Tips pre-saturated with copper-sulfate
- Knurled nut for easy lead connection
- Charged with copper-sulfate
- (3) Diameters to choose from
- View window allows liquid level observation

Construction:

- Tough plastic bodies
- See through window to check level
- O-ring seals

Applications:

- Pipe to Soil potentials
- Close Interval Surveys
- Structure to Cell
- Lab use

Recommendations:

Use with most CP Voltmeters
Half cell models 3, 6 & 8 screw into back of
T&R CPV-2 and CPV-4 CP Voltmeters

Specifications:

High purity copper rod
Copper-Sulfate crystals

Dimensions:

2-A: 3/8" x 5-3/4"
3-A: 3" x 5"
6-A: 1-1/4" x 6"
6-B: 1-1/4" x 7"
8-A: 1-1/4" x 8"
8-B: 1-1/4" x 9"



Half Cells, CP Voltmeters and Extension Handles

DELIVERY: **Immediately from STOCK**
F.O.B. San Gabriel, CA USA
SERVICE: **24-hour Turn-Around**
TERMS: Net30 Days, on approval of credit
WARRANTY: **90 Days**, parts and labor

AVAILABLE FROM STOCK